

.163"(4.14mm) pitch crimp terminal




T66A5/T66A6 Series

- * Material: Brass.
- * Finished: Tin-plated
- * Used in H66A5/H66A6 series housings
- * Wire range: AWG#18~#24
- * Insulation O.D: 3.0mm(max)
- * Thickness: 0.20mm
- * Q'TY: 4,000pcs/reel


Pc Board Socket

P/N: T66A5P Used in H66A6/H66A6E

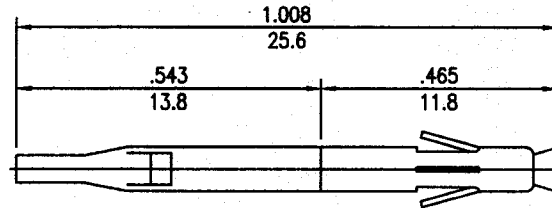


inches
mm

P/N: T66A5 Used in H66A5

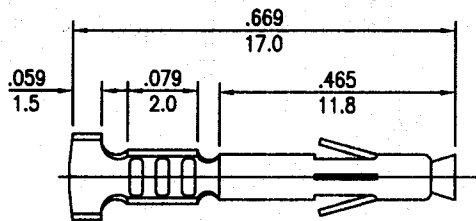

P/N: T66A6 Used in H66A6/H66A6E

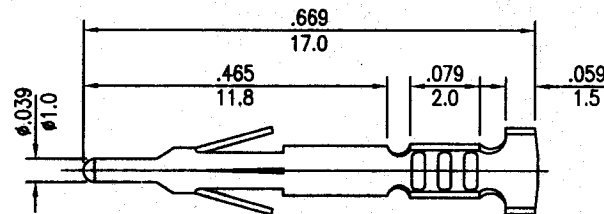



.163"(4.14mm) pitch connectors

H66A5/H66A6 Series



- * Poles: 1,2,3,4,6,9,12,15
 - * Material: NYLON 66 UL94V-2
 - * Suitable T66A5/T66A6 series terminal
- Specifications
- * Current rating: 5A AC, DC
 - * Voltage rating: 300V AC, DC
 - * Temperature range: -25°C~+90°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1,500V AC/minute
 - * Tolerance: ±0.3mm

inches
mm



P/N: H66A5-01





P/N: H66A6-01



P/N: H66A5-02



P/N: H66A6E-02



P/N: H66A6-02

