




.100"(2.54mm) pitch Wire to Board Connectors



CH2543 Series

- * Poles:2-18
 - * Material:PBT UL94V-0 ,BLACK
 - * Suitable CT2543T series terminal
 - * Mates with CW2543 series wafer
- Specifications
- * Current rating: 2.5A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 800V AC/minute

inches
mm

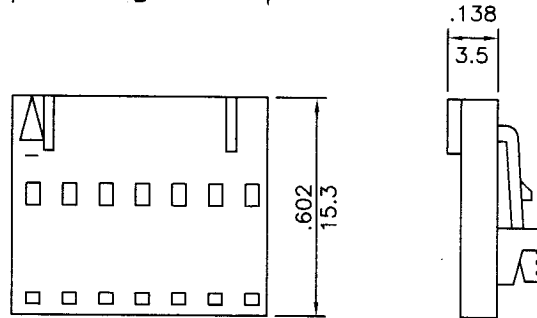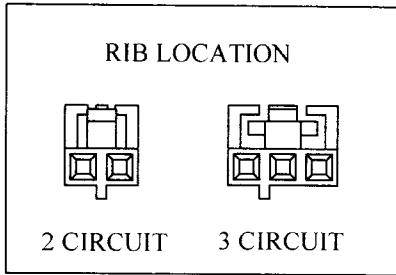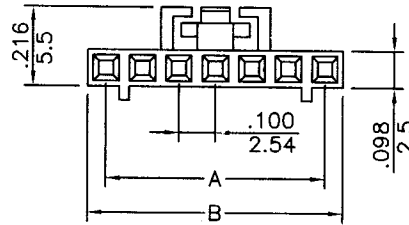

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CH2543-02	0.100(2.54)	0.210(5.35)	11	CH2543-11	1.000(25.40)	1.110(28.21)
3	CH2543-03	0.200(5.08)	0.310(7.89)	12	CH2543-12	1.100(27.94)	1.210(30.75)
4	CH2543-04	0.300(7.62)	0.410(10.43)	13	CH2543-13	1.200(30.48)	1.310(33.29)
5	CH2543-05	0.400(10.16)	0.510(12.97)	14	CH2543-14	1.300(33.02)	1.410(35.83)
6	CH2543-06	0.500(12.70)	0.610(15.51)	15	CH2543-15	1.400(35.54)	1.510(38.37)
7	CH2543-07	0.600(15.24)	0.710(18.05)	16	CH2543-16	1.500(38.10)	1.610(40.91)
8	CH2543-08	0.700(17.78)	0.810(20.59)	17	CH2543-17	1.600(40.64)	1.710(43.45)
9	CH2543-09	0.800(20.32)	0.910(23.13)	18	CH2543-18	1.700(43.18)	1.810(45.99)
10	CH2543-10	0.900(22.86)	1.010(25.67)				

.100"(2.54mm) pitch crimp terminal

CT2543T Series

- * Material:Phos bronze
- * Finished:Tin-plated
- * Used in CH2543, CH2543B, CH2543C series housings
- * Wire range:AWG#24~#28
- * Insulation O.D:1.60mm(max)
- * Thickness:0.2mm
- * Q'TY:15,000pcs/reel

P/N: CK328X
Polarizing Plug

inches
mm

