

# .079"(2.00mm) pitch single row female Headers



CM201 Series

\* Poles:2-40

\* Material:Insulator: NYLON6T UL94V-0  
BLACK


\* Contact material:Phosphor Bronze Gold flash  
Specifications

\* Current rating: 1A AC, DC

\* Voltage rating: 250V AC, DC

\* Temperature range: -40°C~+105°C

\* Insulation resistance: 2,000MΩ min.




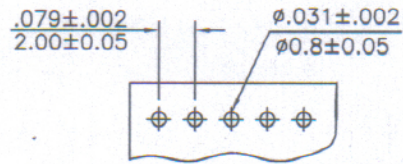


P.C. Board Layout

P/N: CM201S-XXGF

inches  
mm

P/N: CM201R-XXGF

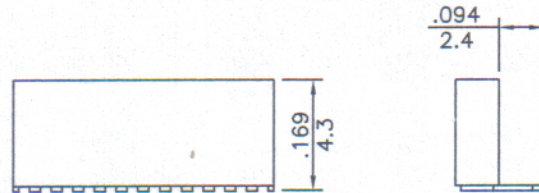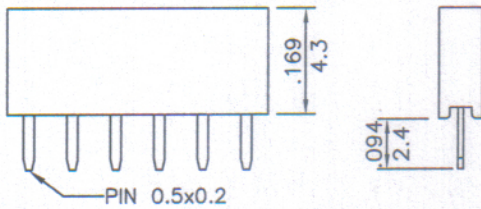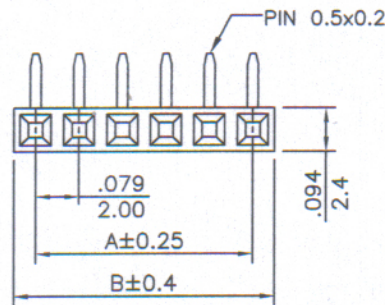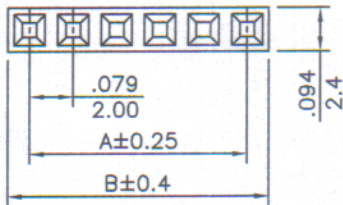

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CM201X-02	0.079(2.00)	0.165(4.2)	22	CM201X-22	1.654(42.00)	1.740(44.2)
3	CM201X-03	0.167(4.00)	0.244(6.2)	23	CM201X-23	1.732(44.00)	1.819(46.2)
4	CM201X-04	0.236(6.00)	0.323(8.2)	24	CM201X-24	1.811(46.00)	1.898(48.2)
5	CM201X-05	0.315(8.00)	0.402(10.2)	25	CM201X-25	1.890(48.00)	1.976(50.2)
6	CM201X-06	0.394(10.00)	0.480(12.2)	26	CM201X-26	1.969(50.00)	2.055(52.2)
7	CM201X-07	0.472(12.00)	0.559(14.2)	27	CM201X-27	2.047(52.00)	2.134(54.2)
8	CM201X-08	0.551(14.00)	0.638(16.2)	28	CM201X-28	2.126(54.00)	2.212(56.2)
9	CM201X-09	0.630(16.00)	0.717(18.2)	29	CM201X-29	2.205(56.00)	2.291(58.2)
10	CM201X-10	0.709(18.00)	0.795(20.2)	30	CM201X-30	2.284(58.00)	2.370(60.2)
11	CM201X-11	0.787(20.00)	0.874(22.2)	31	CM201X-31	2.362(60.00)	2.449(62.2)
12	CM201X-12	0.866(22.00)	0.953(24.2)	32	CM201X-32	2.441(62.00)	2.527(64.2)
13	CM201X-13	0.945(24.00)	1.031(26.2)	33	CM201X-33	2.520(64.00)	2.606(66.2)
14	CM201X-14	1.024(26.00)	1.110(28.2)	34	CM201X-34	2.599(66.00)	2.685(68.2)
15	CM201X-15	1.102(28.00)	1.189(30.2)	35	CM201X-35	2.677(68.00)	2.764(70.2)
16	CM201X-16	1.181(30.00)	1.268(32.2)	36	CM201X-36	2.756(70.00)	2.842(72.2)
17	CM201X-17	1.260(32.00)	1.346(34.2)	37	CM201X-37	2.835(72.00)	2.921(74.2)
18	CM201X-18	1.339(34.00)	1.425(36.2)	38	CM201X-38	2.913(74.00)	3.000(76.2)
19	CM201X-19	1.417(36.00)	1.504(38.2)	39	CM201X-39	2.992(76.00)	3.079(78.2)
20	CM201X-20	1.496(38.00)	1.583(40.2)	40	CM201X-40	3.071(78.00)	3.157(80.2)
21	CM201X-21	1.575(40.00)	1.661(42.2)				