

.079"(2.00mm) pitch dual row female Headers




CM202 Series

- * Poles:4-80
- * Material:Insulator: NYLON6T UL94V-0 BLACK
- * Contact material: Phosphor Bronze Gold flash

Specifications

- * Current rating: 1A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 2,000MΩ min.

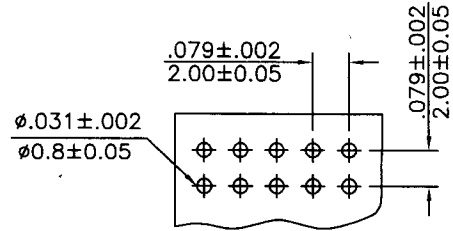


P.C. Board Layout


P/N: CM202S-2xXXGF

inches
mm


P/N: CM202R-2xXXGF




(2.0x NO. OF CONTACTS)+0.25

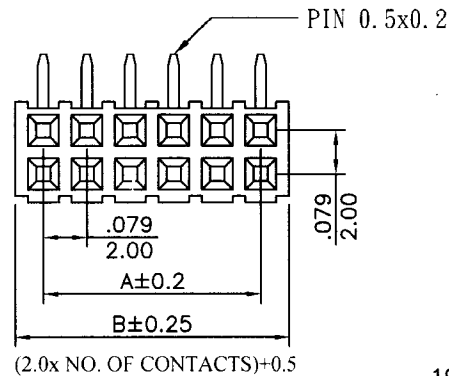

(2.0x NO. OF CONTACTS)+0.5

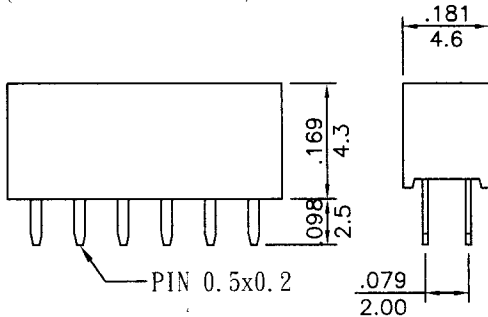

PIN 0.5x0.2

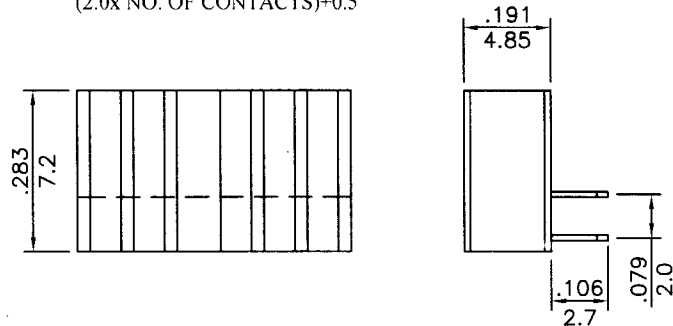

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	
4	CM202X-2X2	0.079(2.00)	
6	CM202X-2X3	0.167(4.00)	
8	CM202X-2X4	0.236(6.00)	
10	CM202X-2X5	0.315(8.00)	
12	CM202X-2X6	0.394(10.00)	
14	CM202X-2X7	0.472(12.00)	
16	CM202X-2X8	0.551(14.00)	
18	CM202X-2X9	0.630(16.00)	
20	CM202X-2X10	0.709(18.00)	
22	CM202X-2X11	0.787(20.00)	
24	CM202X-2X12	0.866(22.00)	
26	CM202X-2X13	0.945(24.00)	
28	CM202X-2X14	1.024(26.00)	
30	CM202X-2X15	1.102(28.00)	
32	CM202X-2X16	1.181(30.00)	
34	CM202X-2X17	1.260(32.00)	
36	CM202X-2X18	1.339(34.00)	
38	CM202X-2X19	1.417(36.00)	
40	CM202X-2X20	1.496(38.00)	
42	CM202X-2X21	1.575(40.00)	

CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	
44	CM202X-2X22	1.654(42.00)	
46	CM202X-2X23	1.732(44.00)	
48	CM202X-2X24	1.811(46.00)	
50	CM202X-2X25	1.890(48.00)	
52	CM202X-2X26	1.969(50.00)	
54	CM202X-2X27	2.047(52.00)	
56	CM202X-2X28	2.126(54.00)	
58	CM202X-2X29	2.205(56.00)	
60	CM202X-2X30	2.284(58.00)	
62	CM202X-2X31	2.362(60.00)	
64	CM202X-2X32	2.441(62.00)	
66	CM202X-2X33	2.520(64.00)	
68	CM202X-2X34	2.599(66.00)	
70	CM202X-2X35	2.677(68.00)	
72	CM202X-2X36	2.756(70.00)	
74	CM202X-2X37	2.835(72.00)	
76	CM202X-2X38	2.913(74.00)	
78	CM202X-2X39	2.992(76.00)	
80	CM202X-2X40	3.071(78.00)	