



P.C.B. LAYOUT

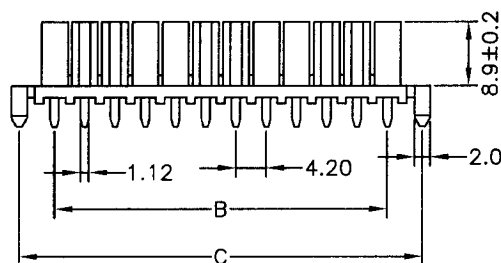

MATERIAL:

Housing: Nylon 66, UL 94V-0 Color: White.
Contacts: Brass tin-plated

FEATURES:

Available in 2 thru 24 circuits
Voltage rating: 500V/AC (R.M.S.)
Current rating: 8 Amps Max.
Mates with CH4205-XX series Housing
And CW4203R-XX, W4240D-XX series header.

ELECTRICAL:

Withstanding Voltage: 1500V AC for 60 seconds.
Insulation Resistance: 1000 Megohms Min.
Contact Resistance: 10 Milliohms Max.
Storage Temperature Range: -40°C to 105°C
Temperature Rise: 30°C Max.

ORDERING CODE

CM4203SA - 24 W0 T
1 2 3 4

- 1.SERIES NO.
- 2.CIRCUIT SIZE:
02~24
- 3.HOUSING MATERIAL:
W0=NYLON 66, UL 94V-0
Color: WHITE
- 4.TERMINAL PLATING:
T=Tin plated

TOLERANCE

2P~8P A±0.3 B±0.2
10P~16P A±0.4 B±0.3
18P~24P A±0.5 B±0.4

CIRCUITS	DIMENSION mm			CIRCUITS	DIMENSION mm		
	A	B	C		A	B	C
2	11.4		9.4	14	36.6	25.20	34.6
4	15.6	4.20	13.6	16	40.3	29.40	38.8
6	18.9	8.40	17.8	18	45.0	33.60	43.0
8	24.0	12.60	22.0	20	49.2	37.80	47.2
10	28.2	16.80	26.2	22	53.4	42.00	51.4
12	32.4	21.00	30.4	24	57.6	46.20	55.6

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	4.20mm Board to Board Connector	GENERAL TOLERANCE	DRAWN	許建華	DATE	2008.04.30		
	PART NO.	CM4203SA-XXW0T	DIM: X. ±0.5 X.X ±0.25 X.XX ±0.2 X.XXX ±0.08	CHECK		DATE			
	DWG.NO.	CM4203SA-XXW0T		APPROVE		DATE			
				SCALE	1:1	UNIT	mm	REV.	01