

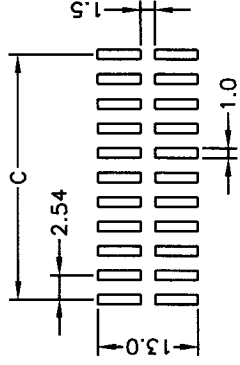
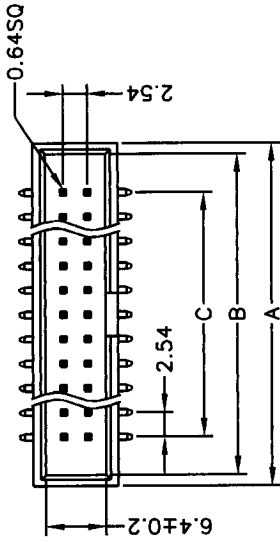


Specifications

- * Material: Insulator: Nylon 6T UL94V-0, BLACK
- * Contact: Brass, gold plated
- * Current rating: 1Amp max
- * Voltage rating: 250V AC max
- * Contact resistance: 20mΩ max.
- * Insulation resistance: 5,000MΩ min.
- * Withstand voltage: 1,000 VAC/minute
- * Temperature range: -40°C~+105°C
- * Recommended Soldering temp: 250 for 10 second



P.C. Board Layout

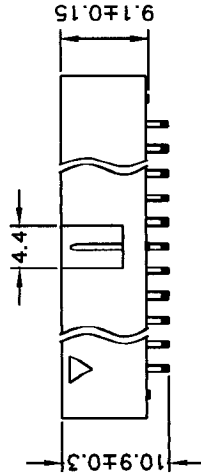

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
6	CW2545ST-2X3	15.30	13.90	5.08
8	CW2545ST-2X4	17.88	15.42	7.62
10	CW2545ST-2X5	20.30	17.90	10.16
14	CW2545ST-2X7	25.38	23.07	15.24
16	CW2545ST-2X8	27.92	25.45	17.78
20	CW2545ST-2X10	33.00	30.60	22.86
24	CW2545ST-2X12	38.25	35.92	27.94
26	CW2545ST-2X13	40.65	38.46	30.50
30	CW2545ST-2X15	45.97	43.57	35.56
34	CW2545ST-2X17	50.80	48.70	40.64
40	CW2545ST-2X20	58.70	56.30	48.26
44	CW2545ST-2X22	63.86	61.43	53.42
50	CW2545ST-2X25	71.30	68.96	61.03
60	CW2545ST-2X30	84.15	81.78	73.70
64	CW2545ST-2X32	89.25	86.83	78.74

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	2.54mm pitch SMT Box Header		GENERAL TOLERANCE	DIM: ±0.5 X.X ±0.25 X.XX ±0.2 X.XXX ±0.08	DRAWN	許建華	DATE	2005.11.02
	PART NO.	CW2545ST-2xXX		CHECK		DATE			
	DWG.NO.	CW2545ST-2xXX		APPROVE		DATE			
				SCALE	2:1	UNIT	mm	REV.	01