



P/N: CW4201S-2xXX

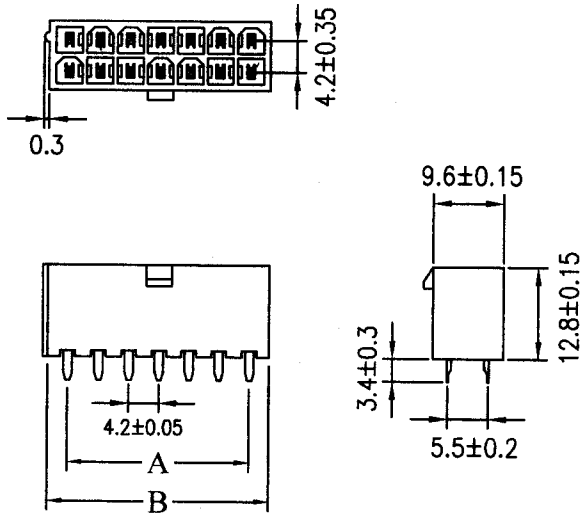

P/N: CW4201SA-2xXX

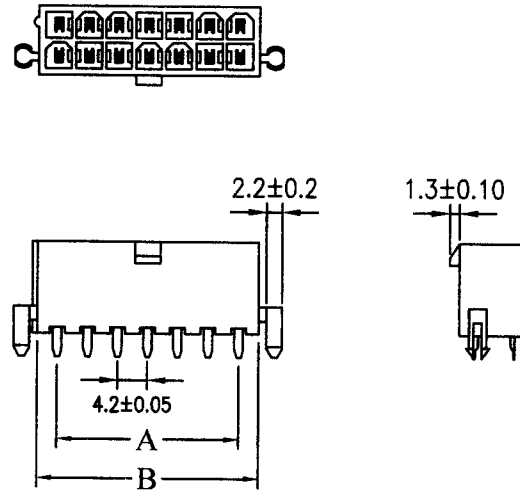


NOTES :


- * Poles:2-24
 - * Material:Insulator:NYLON66 UL94V-2 Natural
 - * Contact:brass,tin plated
 - * Mates with CH4201-2xXX series housing
- Specifications
- * Current rating: 8A AC, DC
 - * Voltage rating:500V AC, DC
 - * Temperature range: -25°C~+85°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1500V AC/minute
 - * Applicable PC board thickness: .063" (1.6mm)

DIM. "A" & "B" TOLERANCE:

- 2×1P~2×04P=±0.20
- 2×5P~2×08P=±0.30
- 2×9P~2×12P=±0.40



P.C. Board Layout

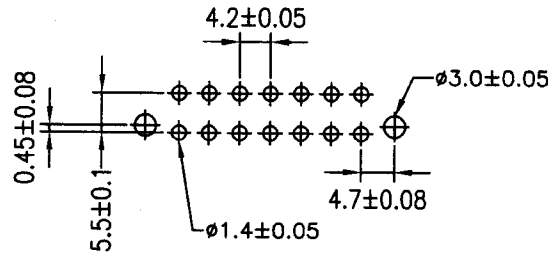

P.C. Board Layout

CKTS	PART NO.	DIM. "A"	DIM. "B"
2	CW4201SX-2X1		5.2
4	CW4201SX-2X2	4.20	9.4
6	CW4201SX-2X3	8.40	13.6
8	CW4201SX-2X4	12.60	17.8
10	CW4201SX-2X5	16.80	22.0
12	CW4201SX-2X6	21.00	26.2
14	CW4201SX-2X7	25.20	30.4
16	CW4201SX-2X8	29.40	34.6
18	CW4201SX-2X9	33.60	38.8
20	CW4201SX-2X10	37.80	43.0
22	CW4201SX-2X11	42.00	47.2
24	CW4201SX-2X12	46.20	51.4

詮盛企業股份有限公司
CHIEN SHERN ENTERPRISE CO.,LTD.

TITLE	4.20mm pitch 180° Power Connectors
PART NO.	CW4201SX-2xXX
DWG.NO.	CW4201SX-2xXX

TOLERANCE	DRAWN	DATE	2005.11.02
DIM.	CHECK	DATE	
0.0 ±0.30	APPROVE	DATE	
0.00 ±0.20	SCALE	UNIT	mm
0.000 ±0.08			