

.200"(5.08mm) Pitch Wire to Board Header Dip Type



CW5082 Series

- * Material: Insulator: Nylon 66 UL 94V-2 Natural
- * Contact: .045"(1.14mm) straight square pin
- * Tin plated brass pins.






SPECIFICATIONS

- * Current rating: 7A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+105°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063"(1.6mm)


mm

P/N: CW5082S-XX

P/N: CW5082R-XX

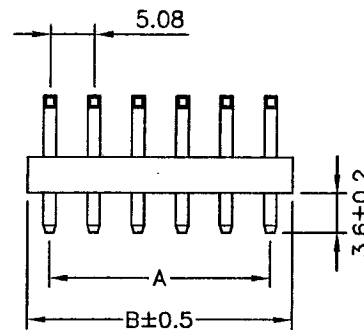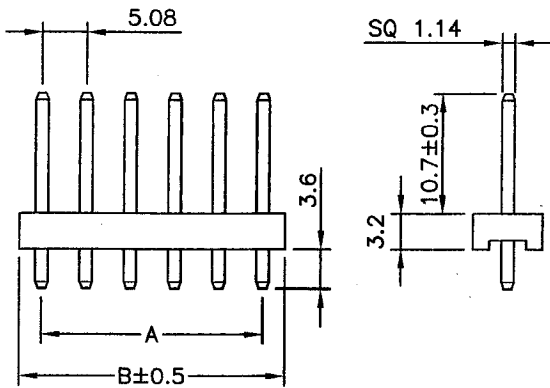

P.C Board Layout



P.C Board Layout

| CKTS | PART NO. | DIM. "A" | DIM. "B" | CKTS | PART NO. | DIM. "A" | DIM. "B" |
|------|-----------|----------|----------|------|------------|----------|----------|
| 2 | CW5082X-2 | 5.08 | 10.16 | 7 | CW5082X-7 | 30.48 | 35.56 |
| 3 | CW5082X-3 | 10.16 | 15.24 | 8 | CW5082X-8 | 35.56 | 40.64 |
| 4 | CW5082X-4 | 15.24 | 20.32 | 9 | CW5082X-9 | 40.64 | 45.72 |
| 5 | CW5082X-5 | 20.32 | 25.40 | 10 | CW5082X-10 | 45.72 | 50.80 |
| 6 | CW5082X-6 | 25.40 | 30.48 | | | | |