

1.27mm Base Height 2.54mm single row pin Headers



P1272 SERIES SPECIFICATIONS


- * Circuits:02-50
- * Material:Insulator:NYLON6T UL 94V-0 BLACK
- * Contact:0.46mm(.018") square pin,brass, gold plated gold flash
- * Current rating: 1A AC, DC
- * Voltage rating: 100V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 500V AC/minute
- * Unspecified tolerance: ± 0.25

ORDERING CODE

P1272X-XX G AXXBXXCXX
 1 2 3 4


1. SERIES NO.
2. NO.OF CIRCUIT 02~50
3. CONTACT PLATING
G:GOLD FLASH
T:TIN
4. A/B/C DIMENSION

P1272S SERIES

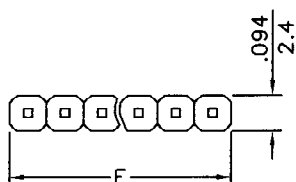


(NO. OF CONTACTS)X1.27

P1272R SERIES

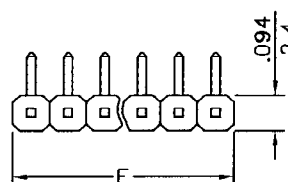


(NO. OF CONTACTS)X1.27


inches
mm



(NO. OF CONTACTS-1)X1.27

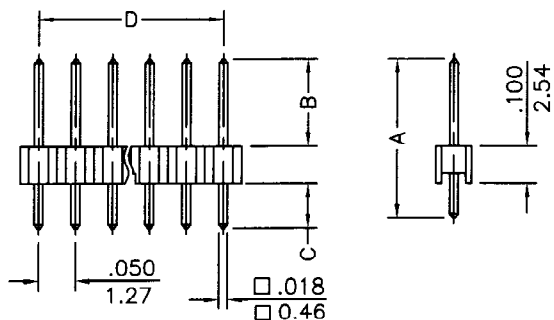


(NO. OF CONTACTS-1)X1.27

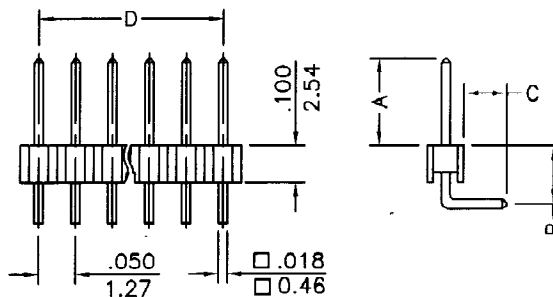


SPECIAL DIM NEED MOQ REQUIREMENT.

P1272S SERIES	DIMENSION in.(mm)		
	A	B	C
STANDARD TYPE	.319(8.1)	.102(2.6)	.118(3.0)
SPECIAL DIM.			

P1272R SERIES	DIMENSION in.(mm)		
	A	B	C
STANDARD TYPE	.126(3.2)	.161(4.1)	.118(3.0)
SPECIAL DIM.			



P.C. Board Layout



P.C. Board Layout