

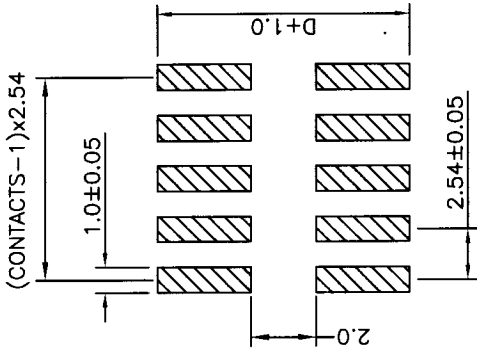



**Specifications**


- \* Material: Insulator: Polyester, UL 94V-0  
Standard: Nylon6T BLACK
- \* Contact: 0.64mm (.025") square pin, brass,
- \* Current rating: 3Amps
- \* Temperature range: -40°C ~ +105°C
- \* Insulation resistance: 1,000MΩ min.
- \* Dielectric Withstanding : AC 600V
- \* Contact Plated: See Option / Standard: Full Gold Flash

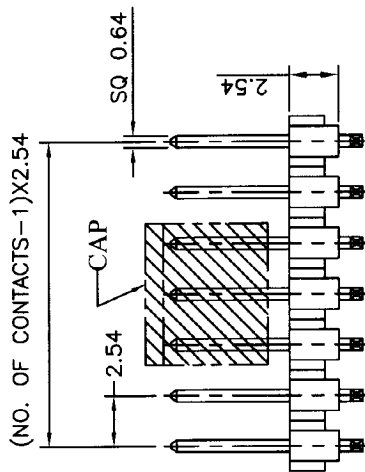

P.C.B SMD LAYOUT

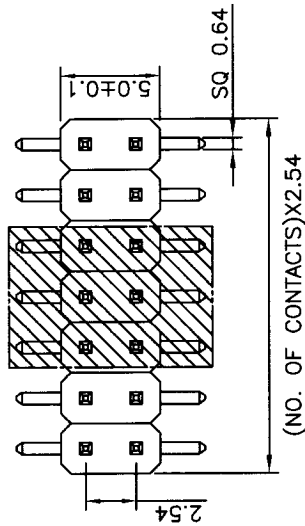

**Order Information**

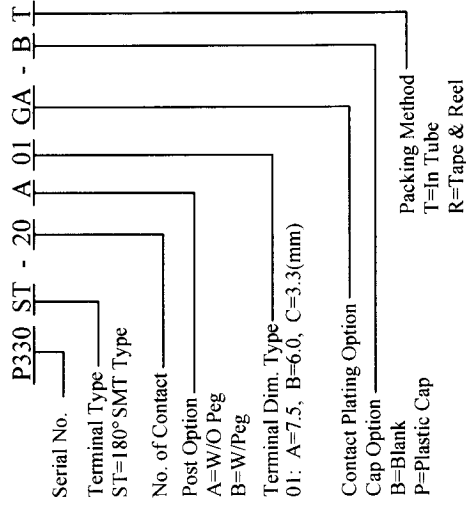

**Contact Plating Option**

Full Gold Plating	Gold Plating On Contact Area Tin Plating On Solder Area	Full Tin Plating
GA=Gold Flash GC=Gold 10u" GD=Gold 15u" GE=Gold 30u"	SA=Gold Flash SC=Gold 10u" SD=Gold 15u" SE=Gold 30u"	TA=Tin 100u"

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	Pin Header Pitch 2.54X2.54mm Dual Row Plastic Height 2.54mm SMT 180° Type	GENERAL TOLERANCE	DRAWN	許建華	DATE	2005.07.10
	PART NO.	P330ST-20A01GA-BT	DIM:	CHECK		DATE	
	DWG. NO.	P330ST-20A01GA-BT	X: ±0.5 X.X ±0.25 X.XX ±0.2 X.XXX ±0.08	APPROVE		DATE	
			SCALE	2:1	UNIT	mm	REV.
							01