

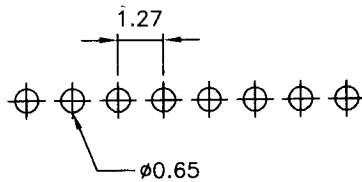
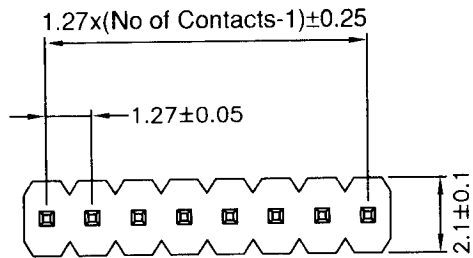


ROHS



P.C.B. Layout

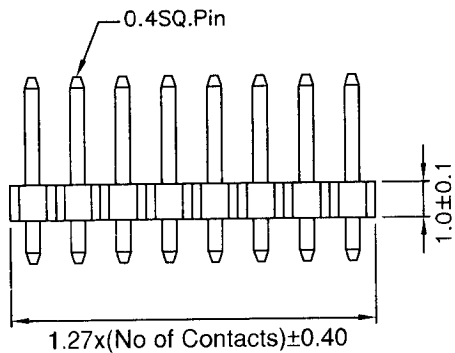


SPECIFICATIONS

- * Current rating: 1Amp
- * Operating Temperature: -40°C~+105°C
- * Insulator resistance: 1,000MΩ min.
- * Contact resistance: 20mΩ max.
- * Dielectric Withstanding: 300V AC
- * Insulator Material: Polyester UL94V-0 Nylon-6T
- * Contact Material: 0.40mm(.016") square pin Brass
- * Contact Plated: Full Gold Flash

ORDERING CODE

PHC1 - S 1 x XX - 01 GA

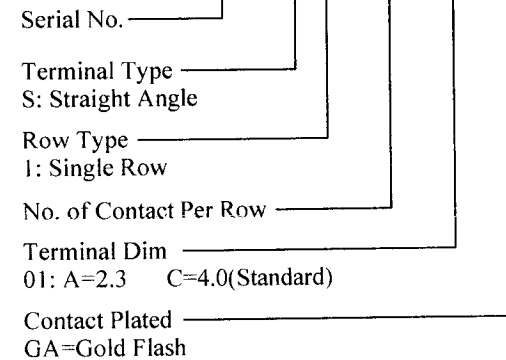

詮盛企業股份有限公司 CHIEN, SHERN ENTERPRISE CO.,LTD.	TITLE	Pitch 1.27mm Pin Header Straight Angle H:1.0mm	TOLERANCE	DRAWN	許建華	DATE	2011.05.25		
	PART NO.	PHC1-S1xXX-01GA	DIM.	CHECK		DATE			
	DWG.NO.	PHC1-S1xXX-01GA	.0 ±0.30	APPROVE		DATE			
			.00 ±0.20	SCALE	5:1	UNIT	mm	REV.	01
			.000 ±0.10						