

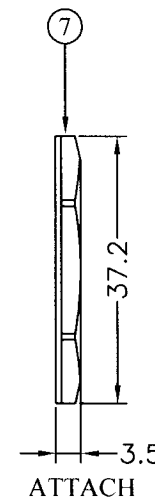
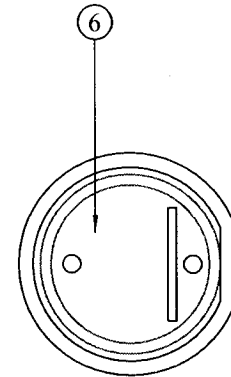



Recommended Panel Cut-Out

MOUNT INNER TYPE (內鎖)

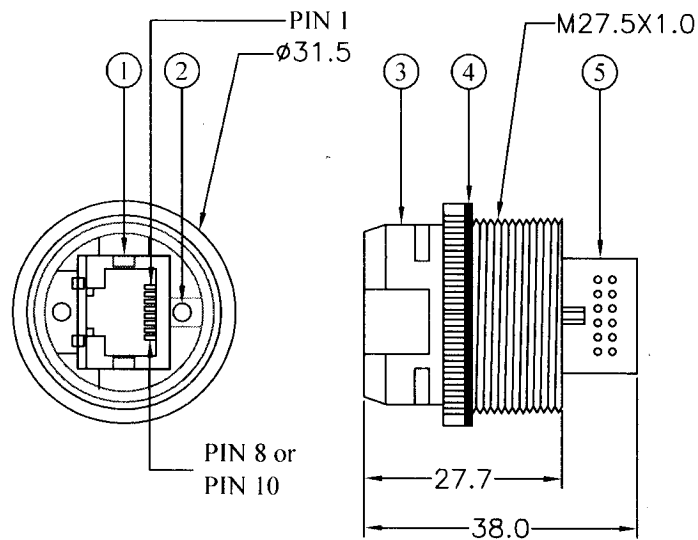

Note:
Waterproof Rate : IP 68
UV Resist
Applicable Panel Borad Thickness:
2.0~4.0mm

MOUNT OUTER TYPE (外鎖)

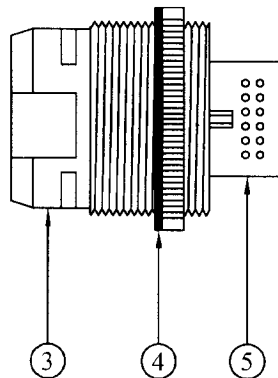

ORDERING CODE

RJ45J B - 088 Y A - D

SERIES NO.

B=MOUNT INNER
C=MOUNT OUTER

088=JACK 8P8C
100=JACK 10P10C

Y=W/POWER TERMINAL
N=W/O POWER TERMINAL

WIRE SOLDER TYPE

D=W/DUST COVER
N=W/O DUST COVER

PIN OUT:

RJ45-8P&10P		CONN-2X6P
10P	8P	
1		1
2	1	2
3	2	3
4	3	4
5	4	5
6	5	6
7	6	7
8	7	8
9	8	9
10		10
		11-NC
Shield	Shield	12-GND

NO	NAME	SPECIFICATION
8	For Panel Thickness	Max 5.0mm
7	Nut	Nylon + GF Black
6	Epoxy	Black
5	PCB	FR-4
4	Gasket	EPDM Black
3	Housing	Nylon + GF Black
2	Terminal Pin	Brass Gold Plated 250V/5A
1	RJ45	Shielded Jack 8Pin OR 10Pin

詮盛企業股份有限公司 CHIEN SHERN ENTERPRISE CO.,LTD.	TITLE	QUICK PULL IN-OUT WATER PROOF RJ45 JACK PANEL MOUNT INNER TYPE WIRE SOLDER	TOLERANCE	DRAWN	許建華	DATE	2011.01.12		
	PART NO.	RJ45JX-XXXYA-D	DIM.	CHECK		DATE			
	DWG.NO.	RJ45JX-XXXYA-D	.0 ±0.30 .00 ±0.20 .000 ±0.10	APPROVE		DATE			
				SCALE	1:1	UNIT	mm	REV.	01