

.100"(2.54mm) pitch dual row female Headers




CM330 Series

- * Poles: 4-80
- * Material: Insulator: P.B.T. UL94V-0 Black
- * Contact material: Brass Gold flash

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 2,000MΩ min.






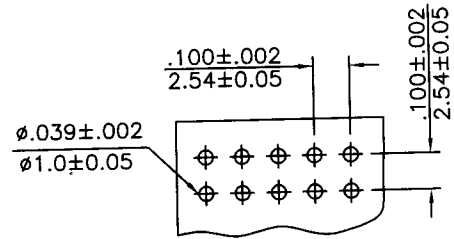


P.C. Board Layout

P/N: CM330S-2xXXGF

inches
mm

P/N: CM330R-2xXXGF

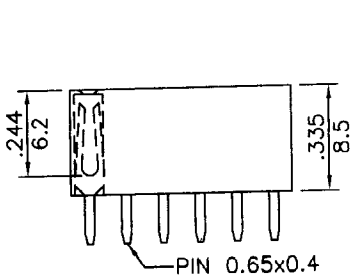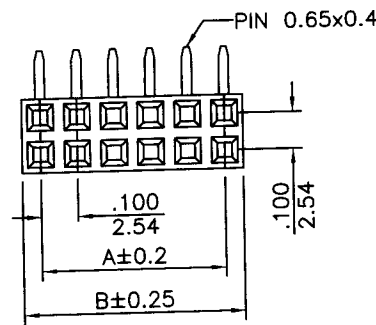

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
4	CM330X-2X2	0.100(2.54)	0.220(5.6)	44	CM330X-2X22	2.100(53.34)	2.220(56.4)
6	CM330X-2X3	0.200(5.08)	0.319(8.1)	46	CM330X-2X23	2.200(55.88)	2.323(59.0)
8	CM330X-2X4	0.300(7.62)	0.421(10.7)	48	CM330X-2X24	2.300(58.42)	2.421(61.5)
10	CM330X-2X5	0.400(10.16)	0.524(13.3)	50	CM330X-2X25	2.400(60.96)	2.520(64.0)
12	CM330X-2X6	0.500(12.70)	0.622(15.8)	52	CM330X-2X26	2.500(63.50)	2.622(66.6)
14	CM330X-2X7	0.600(15.24)	0.720(18.3)	54	CM330X-2X27	2.600(66.04)	2.724(69.2)
16	CM330X-2X8	0.700(17.78)	0.823(20.9)	56	CM330X-2X28	2.700(68.58)	2.823(71.7)
18	CM330X-2X9	0.800(20.32)	0.921(23.4)	58	CM330X-2X29	2.800(71.12)	2.921(74.2)
20	CM330X-2X10	0.900(22.86)	1.024(26.0)	60	CM330X-2X30	2.900(73.66)	3.024(76.8)
22	CM330X-2X11	1.000(25.40)	1.122(28.5)	62	CM330X-2X31	3.000(76.20)	3.122(79.3)
24	CM330X-2X12	1.100(27.94)	1.220(31.0)	64	CM330X-2X32	3.100(78.74)	3.220(81.8)
26	CM330X-2X13	1.200(30.48)	1.323(33.6)	66	CM330X-2X33	3.200(81.28)	3.323(84.4)
28	CM330X-2X14	1.300(33.02)	1.421(36.1)	68	CM330X-2X34	3.300(83.82)	3.421(86.9)
30	CM330X-2X15	1.400(35.56)	1.527(38.7)	70	CM330X-2X35	3.400(86.36)	3.524(89.5)
32	CM330X-2X16	1.500(38.10)	1.622(41.2)	72	CM330X-2X36	3.500(88.90)	3.622(92.0)
34	CM330X-2X17	1.600(40.64)	1.720(43.7)	74	CM330X-2X37	3.600(91.44)	3.720(94.5)
36	CM330X-2X18	1.700(43.18)	1.823(46.3)	76	CM330X-2X38	3.700(93.98)	3.823(97.1)
38	CM330X-2X19	1.800(45.72)	1.819(48.8)	78	CM330X-2X39	3.800(96.52)	3.921(99.6)
40	CM330X-2X20	1.900(48.26)	2.024(51.4)	80	CM330X-2X40	3.900(99.06)	4.024(102.2)
42	CM330X-2X21	2.000(50.80)	2.122(53.9)				